uvex	SAFETY EYEWEAR	07.07.2023

Product Datasheet model uvex super OTG 9169 260



UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189, D-90766 Fürth

1. Product Characteristics

- classic overspecs for prescription spectacle wearers with an innovative temple concept and a flat lens that offers a wide field of vision
- flexible side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free

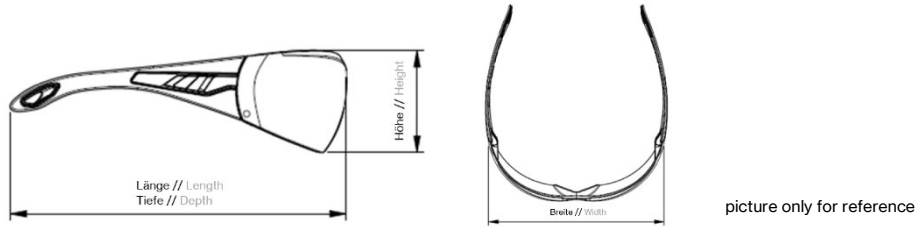



2. Technical Details Body

Front piece	
Material	PA
Colour	blue
Temple	
Material	PA/TPE
Colour	blue, light grey

Marking	
Manufacturer´s ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens	
Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400
Replacement lens	9169255
Marking according to EN	
Filter	2C-1.2 (EN 170)
Manufacturer´s ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product			
Weight	37g		
Dimensions (L x W x B) in approx. mm	 picture only for reference		
	80 x 153 x 58		
	Packing unit 1	**Packing unit 2**	**Packing unit 3**
EAN Code	4031101419091		
Quantity in pcs.	1	8	160
Dimensions (L x W x H) in approx. mm	 picture only for reference		
	80 x 155 x 54	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	37	304	5,920
Gross weight in approx. g	51	510	11,120
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II